


# 銅線用裸圧着端子 丸形端子 〈R形〉

JIS JQ0608003

UL E74917

SF 66230

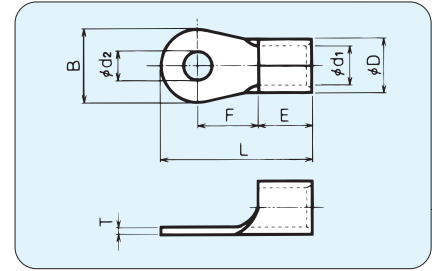

RoHS 指令対応品

| 規格        | 曲げ | 呼び         | 各部の寸法           |      |       |      |      |      |                 | 適合電線範囲 |       |                   | 適合工具                       | 一箱入数   |      |      |      |      |     |      |        |         |  |   |
|-----------|----|------------|-----------------|------|-------|------|------|------|-----------------|--------|-------|-------------------|----------------------------|--|------|------|------|------|-----|------|--------|---------|--|---|
|           |    |            | φd <sub>2</sub> | B    | L     | F    | E    | φD   | φd <sub>1</sub> | T      | 単線mm  | 撚線mm <sup>2</sup> |                            |  | MCM  |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 180-10   | 10.5            | 38.0 | 68.0  | 22.0 | 29.0 | 28.5 | 21.0            | 3.5    | 13.8  | 152.05            | 300-350                    | 12号H<br>*12号A<br>*DS-E200M<br>*DS-E250M<br>REC-Li325 | 10   |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 180-12   | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 180-14   | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 180-16   | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 180-L10  | 10.5            |      | 86.0  | 38.0 |      |      |                 |        |       |                   |                            |  |      | 32.5 | 32.7 | 24.0 | 4.0 | 15.6 | 192.6  | 400     | 12号H<br>*12号A<br>*DS-E200M<br>*DS-E250M<br>REC-Li325 | 8 |
| UL SF ●   |    | R 180-L12  | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 180-L14  | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 180-L16  | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 180-20   | 21.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 180-24   | 25.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 180-27   | 28.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 200-S10  | 10.5            | 44.0 | 71.0  | 21.5 | 32.5 | 32.7 | 24.0            | 4.0    | 15.6  | 192.6             | 400                        | 12号H<br>*12号A<br>*DS-E200M<br>*DS-E250M<br>REC-Li325 | 8    |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 200-S12  | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 200-S14  | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF     |    | R 200-S16  | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL ●      |    | R 200-10   | 10.5            |      | 80.0  | 25.5 |      |      |                 |        |       |                   |                            |  |      | 36.5 | 37.6 | 28.0 | 4.5 | 17.5 | 242.27 | 500-600 | 12号H<br>*12号A<br>REC-Li325                           | 6 |
| JIS UL    |    | R 200-12   | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL    |    | R 200-14   | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL    |    | R 200-16   | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 200-L10  | 10.5            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 200-L12  | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 200-L14  | 15.0            | 91.5 | 37.0  | 36.5 | 37.6 | 28.0 | 4.5             | 20.3   | 325.0 | 500-600           | 12号H<br>*12号A<br>REC-Li325 | 6  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 200-L16  | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS       |    | R 200-18   | 19.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 200-20   | 21.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 200-24   | 25.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 200-27   | 28.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
|           |    | ● R 250-12 | 13.0            | 44.0 | 80.0  |      |      |      |                 |        |       |                   |                            |  | 25.5 | 32.5 | 35.6 | 26.0 | 4.5 | —    | 250    | —       | *DS-E250M  | 8 |
|           |    | ● R 250-14 | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
|           |    | ● R 250-16 | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 325-10   | 10.5            | 50.5 | 92.0  |      |      |      |                 |        |       |                   |                            |  | 30.3 | 36.5 | 37.6 | 28.0 | 4.5 | 17.5 | 242.27 | 500-600 | 12号H<br>*12号A<br>REC-Li325                           | 6 |
| UL SF ●   |    | R 325-12   | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 325-14   | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 325-16   | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 325-L10  | 10.5            |      | 105.0 | 43.3 | 36.5 | 37.6 | 28.0            | 4.5    | 20.3  | 325.0             | 500-600                    | 12号H<br>*12号A<br>REC-Li325                           | 6    |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 325-L12  | 13.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 325-L14  | 15.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| UL SF ●   |    | R 325-L16  | 17.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS       |    | R 325-18   | 19.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 325-20   | 21.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 325-24   | 25.0            | 28.0 |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |
| JIS UL SF |    | R 325-27   | 28.0            |      |       |      |      |      |                 |        |       |                   |                            |  |      |      |      |      |     |      |        |         |  |   |

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
  2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
  3. 上記寸法表にかぎらず特注品もご相談ください。
  4. \*印はUL適合工具です。5. ●・▲印は舌部曲げ加工対象品です。
- (注) 曲げ加工品は各規格に適合していません。曲げ加工品の各寸法は曲げる角度により、異なります。

DAIDO SOLDERLESS TERMINAL MFG.CO.,LTD

